



L-1X
Chemical Sanitizing
Undercounter
Dishwasher



FEATURES:

- **Energy Star Qualified.**
- 30 racks / 120 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and deliming system assures proper chemical usage.
- Convenient to service “Works-in-a-drawer”. All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



Optional dishtable, faucet and pre-rinse unit sold separately.



Pumped drain will drain uphill. Requires no floor drain.



Upper and lower rotating wash arms guarantee excellent results.



“Works-in-a-drawer”, may be removed by disconnecting wires from terminal block.




Optional pedestal allows the L-1X to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 14".





WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

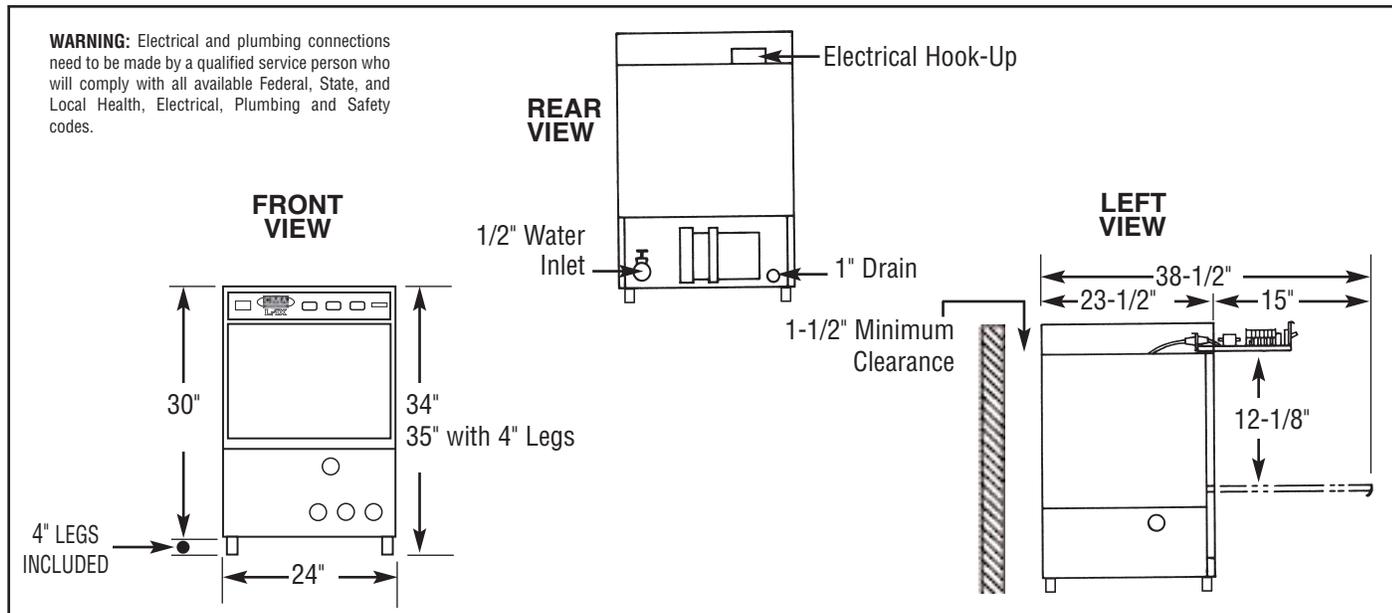

Specifications:

MODEL L-1X	USA	METRIC	USA	METRIC
OPERATING CAPACITY RACKS PER HOUR (NSF RATED)	30	30	WASH PUMP MOTORS HP	1
OPERATING CYCLE			DIMENSIONS	
WASH TIME-SEC	57	57	DEPTH	23-1/2" (59cm)
RINSE TIME-SEC	48	48	WIDTH	24" (61cm)
DWELL/PURGE-SEC	15	15	HEIGHT	30" (76.2cm)
TOTAL CYCLE TIME	120	120	HEIGHT (WITH 4" LEGS)	34-35" (86.3-88.9cm)
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)	MAXIMUM CLEARANCE	
WASH PUMP CAPACITY	35 GPM	(132 LPM)	HEIGHT FOR DISHES	12-1/8" (31cm)
OPERATING TEMPERATURE			STANDARD DISHRACK	
REQUIRED	120°F (49°C)		DIMENSIONS	19-3/4"X19-3/4" (50X50cm)
RECOMMENDED	140°F (60°C)		ELECTRICAL RATING	VOLTS AMPS
WATER CONSUMPTION				115 16
PER RACK	1.7 GAL.	(6.43 L)	SHIPPING WEIGHT	
PER HOUR	40.8 GPH	(154 LPH)	APPROXIMATE	190# (86kg)
WATER INLET	1/2"	-		
DRAIN	1"	-		

Summary Specifications: Model L-1X

CMA Energy Mizer model L-1X low temperature undercounter chemical sanitizing commercial dishwasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1X is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4" x 19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The L-1X incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

Available Options

- Sustainer Heater
- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- Stainless Steel Legs 6" (set of 4)
- Stainless Steel Pedestal (Raises machine 8"-14" off the floor)
- 48" Undercounter dishtable with Pre-Rinse
- Alternative electrical available for export

